

CSB 系列悬挂式控制盒

特性

- 黄色高强度玻璃纤维增强工程塑料壳体
- NEMA 4X 防水等级, 适合室内室外使用
- 环境温度: -20 to 158F (-29 to 70C)
- UL 和 CUL 认可
- 单速, 双速或者开闭形式可选
- 额定值: A600/P600




描述	铭牌标识	自锁机制	壳体类型			连接类型
			Yellow	Black	Red	
Single Speed	Up-Down	Yes	CSB272Y	CSB272B	CSB272R	146
	Forward-Reverse	Yes	CSB273Y	CSB273B	CSB273R	146
	On-Off ^[1]	Yes	CSB274Y	CSB274B	CSB274R	10
	Start-Stop	No	CSB275Y	CSB275B	CSB275R	145
	Start-Stop ^[1]	Yes	CSB276Y	CSB276B	CSB276R	10
	On-Off	No	CSB277Y	CSB277B	CSB277R	146
	Without Inserts	Yes	CSB293Y	CSB293B	CSB293R	146
	Without Inserts	Yes	CSB270Y	CSB270B	CSB270R	25
	Without Inserts	No	CSB271Y	CSB271B	CSB271R	25
	Without Inserts ^[1]	Yes	CSB279Y	CSB279B	CSB279R	147
Single Speed (2NO)	Without Inserts	Yes	CSB290Y	CSB290B	CSB290R	100
	Up-Down	Yes	CSB292Y	CSB292B	CSB292R	100
Two Speed	Without Inserts	Yes	CSB280Y	CSB280B	CSB280R	150
	Up-Down	Yes	CSB282Y	CSB282B	CSB282R	150


[1] 保持式

* Add -A suffix to include a strain Relief

连接类型:

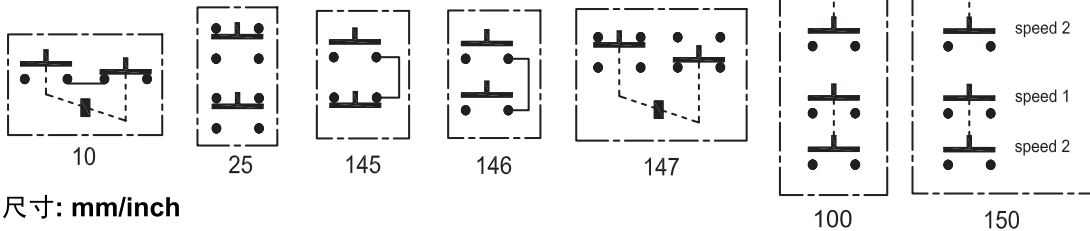

尺寸: mm/inch

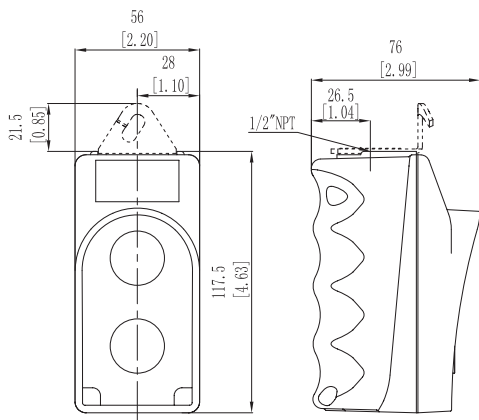

Hanger Bracket and Seal Kit:

Order code: CSB-HG

